



NT5

FEATURES

- True condenser transducer
- Gold sputtered 1/2" Capsule
- Heavy duty satin-nickel-plated body
- Low noise
- Full frequency response
- Custom WS5 Wind Shield
- Custom RM5 Stand Mount
- Supplied as a MATCHED PAIR in a Custom Carry Case

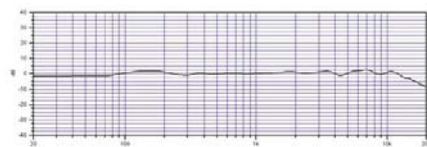

NT5 Frequency Response



NT5 Polar Response

NT5 Specifications:

| | |
|---------------------|---|
| Acoustic Principle: | Externally polarised 0.5" (13mm) condenser transducer |
| Active Electronics: | J-FET Impedance converter with bipolar output buffer |
| Pickup Pattern: | Cardioid (see graph) |
| Frequency Response: | 20Hz to 20kHz (see graph) |
| Output Impedance: | 200Ω |
| Sensitivity: | -38 dB re 1v/Pa (12mV @ 94dB SPL) +/- 2dB |
| Equivalent Noise: | <16 dBA SPL (per IEC651, IEC268-15) |
| Maximum Output: | +13.9 dBu (@ 1% THD into 1kΩ) |
| Dynamic Range: | >128 dB (per IEC651, IEC268-15) |
| Maximum SPL: | 143 dB (@ 1% THD into 1kΩ) |
| Signal/Noise: | 78 dB (1kHz rel 1 Pa; per IEC651, IEC268-15) |
| Power Requirements: | P48, P24 phantom |
| Packed Weight: | 1.8kg (Mic only 100g) |
| Mic Dimensions: | Diameter: 20mm Length: 118mm |
| Packed Dimensions: | 310 x 300 x 110mm |