




Earmic 500 Shure - miniature condenser ear set

Caution!

- ▶ Never dismantle the microphone, as this may cause damage to it!
- ▶ Never drop the mic, as this may cause severe damage!
- ▶ When the microphone is not in use, put it in its case. Clean with damp cloth only.



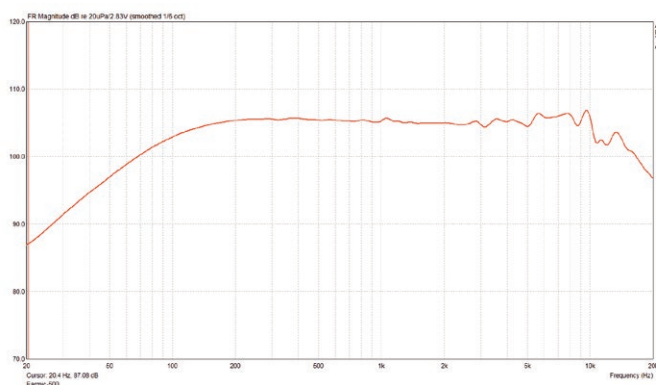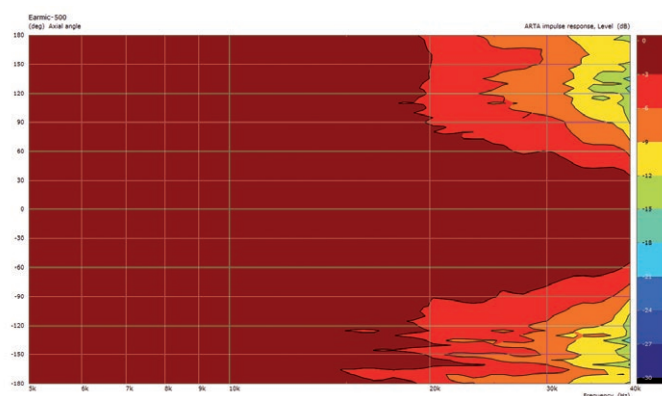


- ✓ TQG-connector for all Shure wireless systems
- ✓ Skin-coloured
- ✓ Weight 13g



Polar pattern @ 1 kHz

Connection / Supply	Mini-XLR / 1.5 - 5 V \equiv
Transducer concept	condenser
Directivity	omnidirectional
Field sensitivity [mV/ Pa]	53.8
Field sensitivity [dB re 1V/ Pa]	-25.4
Equivalent noise level [dB(A)]	19.9
Signal-to-noise ratio [dB(A)]	74.1
Maximum SPL [dB SPL @ 1% THD]	116
Electric impedance [ohm @ 1 kHz]	750
Current draw [mA]	2.1
Frequency response 0.1 m -10 dB	50 - 20.000 Hz

 For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

 This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose of your old device with your normal household waste.  Dispose of this product through an approved waste disposal firm or through your local waste facility. Comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.