


# Installation Instruction for Shadow SH 940 Violin Bridge with built-in Pickup

## Content:

Violin bridge with piezo-pickup,  
Cable holder,  
Integrated Volume and tone control,  
12 foot cable

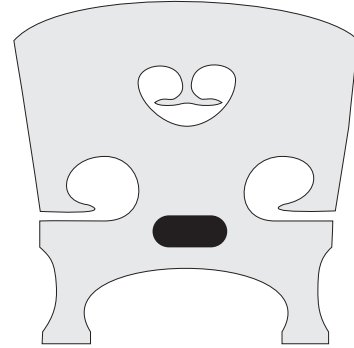

1. Loosen strings and remove original bridge.
2. Carve the new bridge to match the original.
3. Install the bridge in the location of the original and retune the instrument.
4. Mount the included volume and tone control as a chin rest would be mounted.
5. Connect the pickup to the input of the volume and tone control.
6. Connect to an appropriate amplifier with included instrument cable.

## Note:

Piezo pickups and transducers have a very high output impedance. In order to get the optimum sound output we recommend an amplifier with low impedance input.