



SL 75C

Dynamic Cardioid Microphone

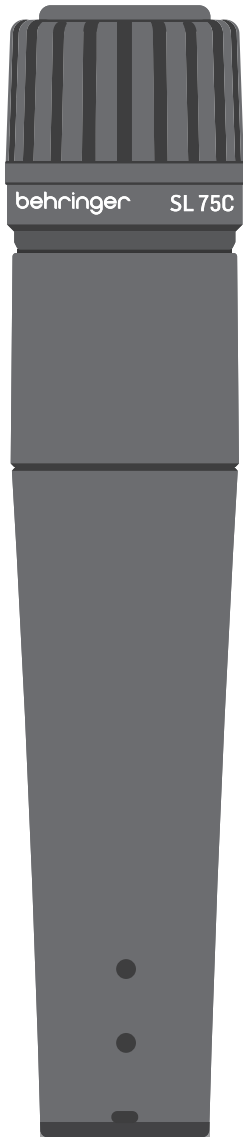

FEATURES

- Dynamic cardioid microphone
- Smooth mid-frequency presence rises for excellent voice, drums and guitars
- Ultra-wide frequency response for brilliant and transparent sound
- Extremely high signal output lets your performance cut through
- Cardioid characteristic minimizes background noise and feedback
- Integrated spherical wind and pop noise filter
- Shock mount system to cut down handling noise
- 3-pin XLR connector for highest signal integrity
- Microphone stand adapter and impact-resistant carrying case included
- 3-Year Warranty Program*
- Designed and engineered in Germany

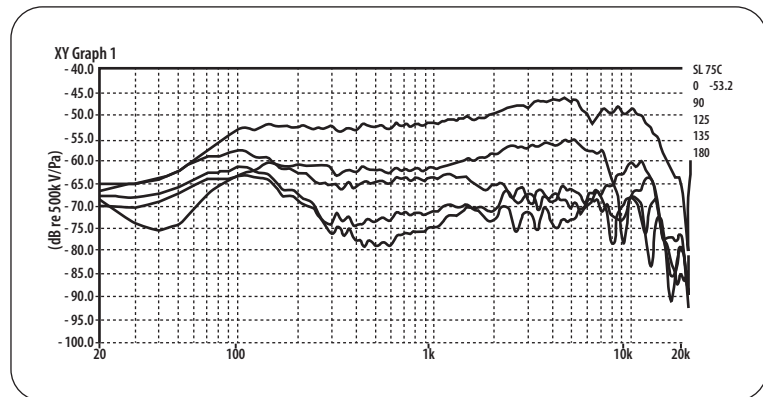

SPECIFICATIONS

Type	Dynamic Cardioid Microphone
Frequency response	40-15000 Hz
Impedance	310 ohm
Connector	3-pin
Polar pattern	Cardioid
Sensitivity	-54 ± 2 dBV /Pa
Max SPL	150 dB
Weight	260 g

Behringer is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera, Auratone and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd. © Music Tribe Global Brands Ltd. 2019 All rights reserved.

